





1200X2400 MM 1200X1800 MM 1200X1200 MM 600X1200 MM



NO.1 TILE COMPANY

8<sup>TH</sup> LARGEST MANUFACTURER





Eternity tiles are glazed vitrified tiles that are unlike anything you've seen before. The extraordinary aesthetic appeal of our Tiles is the outcome of the skill and passion of european master-designers. The designs are contemporary yet evoke a feeling of Timelessness.

Eternity tiles are surprisingly strong, possessing high flexural and breaking strength. Almost 100% non-porous, the tiles. Do not allow water to seep through.

Driven by quality, and going the distance, eternity tiles meet the toughest global standards, every step of the way.

# 4 UNIQUE SIZES, 4 DISTINCT FINISHES WITH STYLISH GRAPHICS



## STUNNING FINISHES



A SPECTACULAR MIRROR LIKE EFFECT IS WHAT YOU GET IN THIS SUPERIOR FINISH, THE BRILLIANT POLISH LOOK IS ACHIEVED WITH HIGH QUALITY GLAZE, THAT HAS REFLECTIVE INDEX VALUE OF MORE THAN 100%. IT ENHANCES IMAGE SHARPNESS AND CREATES A RICH AND TRUE COLOR LOOK.

THIS FINISH IS MADE FOR A
LUXURIOUS WORLD AND IS THE MOST
PREMIUM FINISH. DEVELOPED WITH
ADVANCED DIGITAL TECHNOLOGY, IT HAS
A SMOOTH SURFACE WITH ALMOST ZERO
SURFACE REFLECTION. IT'S A FINE
BALANCE OF DESIGN AND ELEGANCE.



O O M AS SUGGESTED BY THE

DESCRIPTOR 'BOLD', THIS FINISH HAS A ROCK LIKE EFFECT. WITH THE USE OF SPECIAL TECHNIQUE



AND DIGITAL GLAZE
MACHINE, THESE SPECIAL
EFFECTS ARE CREATED TO
GIVE A REAL LIFE STONE
EFFECT.

AN EMBOSS FEEL. MADE USING
QUALITY SPECIAL GLAZE AND A

THESE ARE DÉCOR TILES WHICH COME WITH AN EMBOSS FEEL. MADE USING HIGH QUALITY SPECIAL GLAZE AND A DIGITAL MACHINE, THEY HAVE A UNIQUE TEXTURE WHICH GIVES LINE/ ARROW PUNCH EFFECT.

#### FINISHESAVAILABLE

SIZE	POLISH	BEYOND	BOLD	BLISS
1200X2400 M M 1200X1800 M M 600X1200 M M	\ \ \	\ \ \	\ \ \	<b>/</b>
1200X1200MM	~	_		

# THE ULTIMA 4)/


BLISS FINISH




This Effect is Available in Satuario Luxe, Pavit Grey & Gozzio Beige

GOZZIO BEIGE 1200X2400 | BLISS







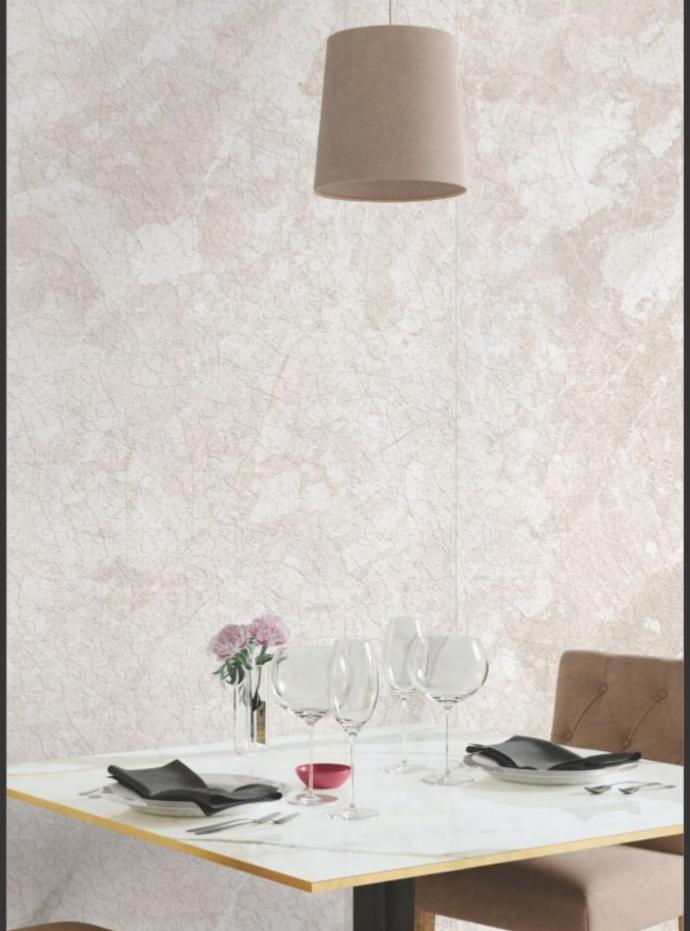

BEYOND FINISH



POLISH FINISH BEYO






GOZZIO BEIGE 1200X2400 | POLISH





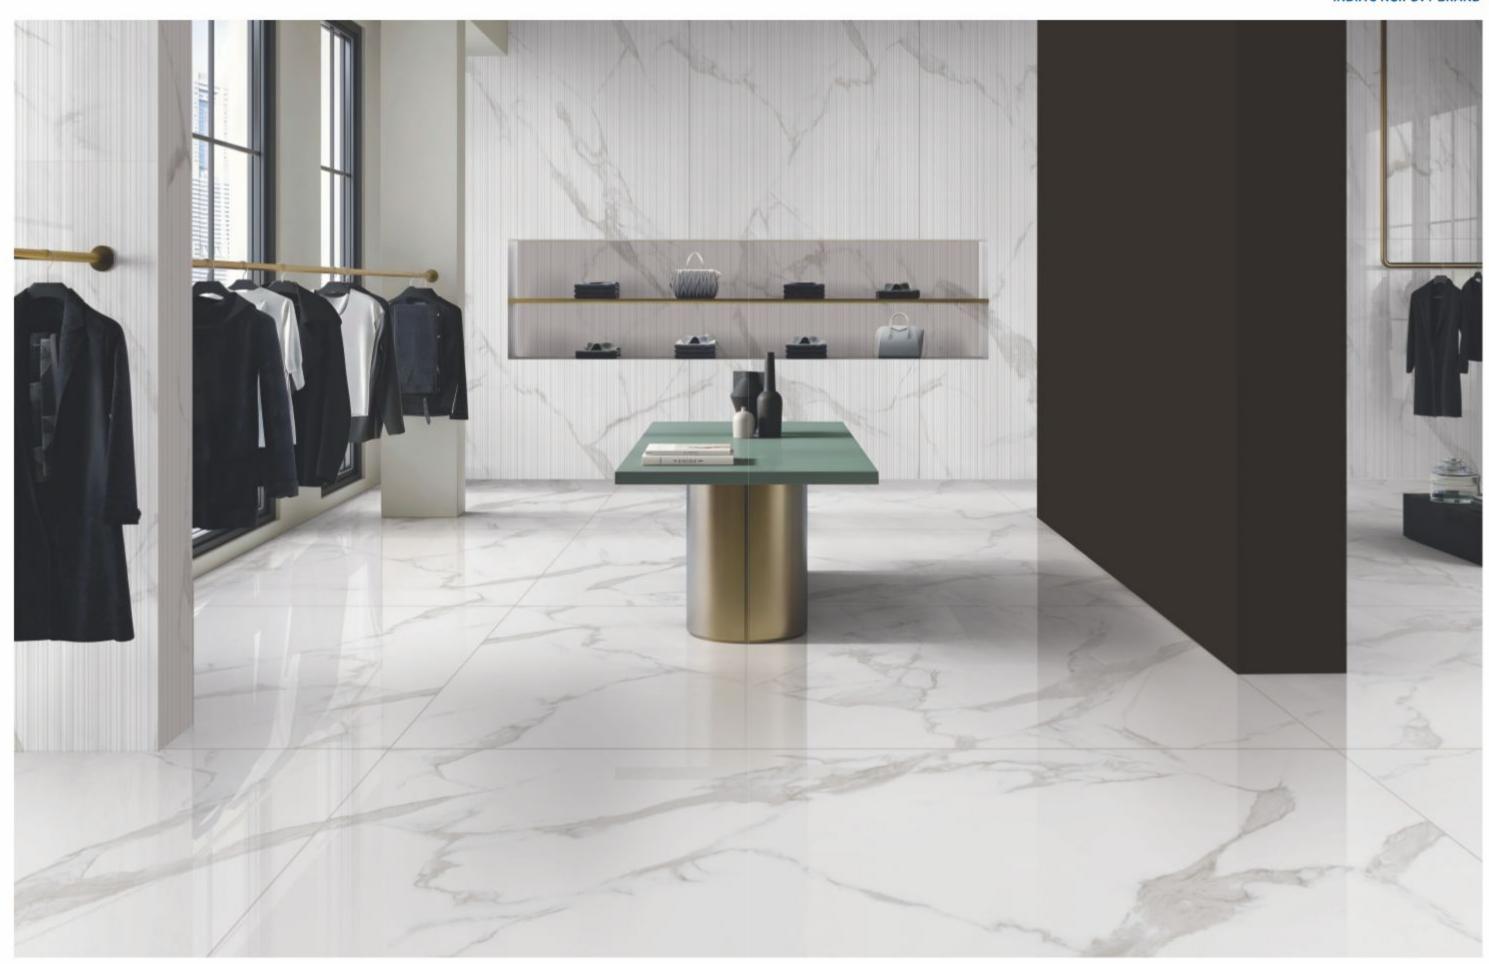







SATUARIO LUXE 1200X2400 MM

FINISHES AVAILABLE
POLISH | BEYOND | BOLD | BLISS



4 FACES



1200X1800 MM

600X1200 MM



1200X1200 MM



SATUARIO LUXE 1200X2400 | BLISS 12














1200X1800 MM 600X1200 MM 1200X1200 MM

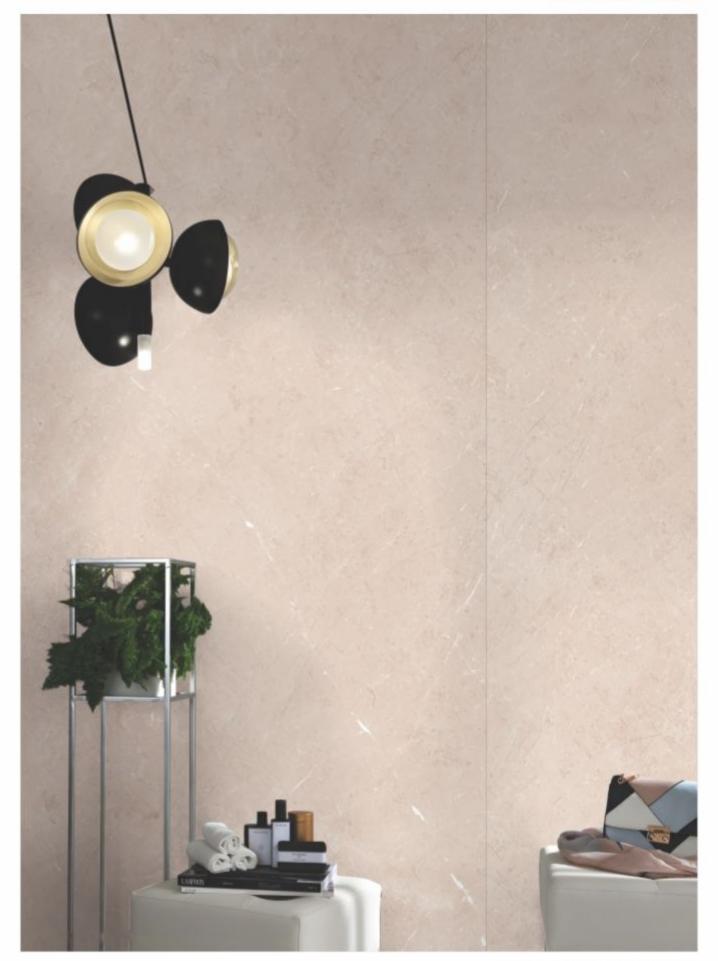

GOZZIO BEIGE 1200X2400 | BEYOND 16













LEGACY GREY 1200X2400 MM

FINISHES AVAILABLE POLISH | BEYOND | BOLD | BLISS






3 FACES

SIZE & FINISH AVAILABLE



1200X1800 MM






600X1200 MM 1200X1200 MM



LEGACY GREY 1200X2400 | BLISS 20





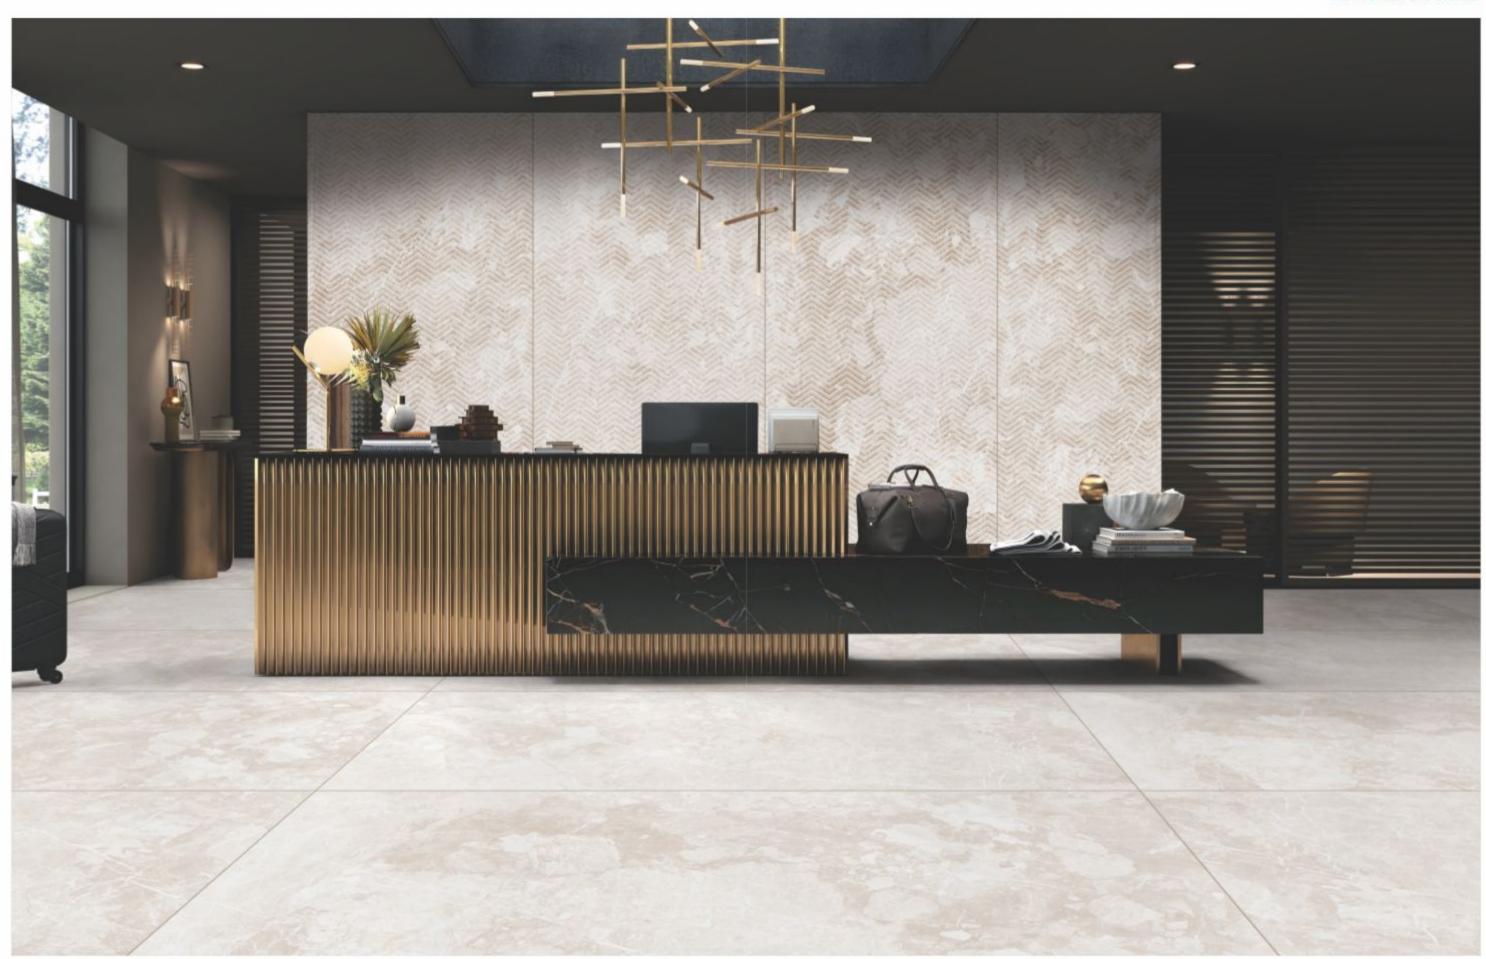








LEGACY MARFIL 1200X2400 MM

FINISHES AVAILABLE
POLISH | BEYOND | BOLD | BLISS





3 FACES





1200X1800 MM

23

POLISH BEYOND



600X1200 MM

1200X1200 MM



LEGACY MARFIL 800X1600 | BOLD 24













PAVIT GREY 1200X2400 MM

FINISHES AVAILABLE POLISH | BEYOND | BOLD | BLISS





4 FACES

SIZE & FINISH AVAILABLE



1200X1800 MM

27





600X1200 MM 1200X1200



PAVIT GREY 1200/2400 | BOED

#### PACKING DETAILS

DIMENSIONS (MM)	NO. OF SLABS/BOX	COVERAGE AREA	
1200x2400	01	2.88 M²	
1200×1800	02	4.32 M²	
1200×1200	02	2.88 M <sup>2</sup>	
600×1200	03	2.16 M <sup>2</sup>	


#### TECHNICAL SPECIFICATIONS

S.No	Technical Characteristics	* IS 15622:2017, *EN 14411:2016 & ISO 13006:2018 Group Bla (Annex G) Standard's Requirement	O 13006:2018 Kajaria Eternity Annex G) Standard's Tile's Specifications		
1.	Deviation in length & width	± 0.1 % ± 0.6 %/ ± 0.3 %	± 0.10 %	IS 13630-1 EN ISO 10545-2	
2.	Deviation in thickness	± 5.0 %	± 4.00 %	IS 13630-1 EN ISO 10545-2	
3.	Deviation in Straightness of sides	± 0.1 % ± 0.5 %/± 0.3 %	± 0.10 %	IS 13630-1 EN ISO 10545-2	
4	Deviation in Rectangularity	± 0.1 % ± 0.5 %/± 0.3 %	± 0.10 %	IS 13630-1 EN ISO 10545-2	
5.	Deviation in Surface Flatness	± 0.5 % ± 0.5 %/± 0.4 %	± 0.15 %	IS 13630-1 EN ISO 10545-2	
6.	Surface quality	95% of the tiles shall be free from visible defects	95% of the tiles shall be free from visible defects	IS 13630-1 EN ISO 10545-2	
7.	Modulus of rupture	Avg. 35 N/mm2, individual Min 32 N/mm2	≥ 40 N/mm²	IS 13630-6 / EN ISO 10545-4	
8.	Breaking strength	Minimum 1300 N	≥ 2000 N	IS 13630-6 / EN ISO 10545-4	
9.	Bulk Density	Minimum 2.20 g/cc	≥ 2.25 g/cc	IS 13630-2	
10.	Glossiness	Manufacture to state the class	Min 5 for Rustic/Matt/Satin Finish Min 90 for Polish Finish	Glossimeter 60 degrees	
11.	Water Absorption	≤ 0.08 %, Individual Max 0.1% ≤ 0.5 %, Individual Max. 0.6 %	≤ 0.08 %, Individual Max 0.1% ≤ 0.3 % (Only for 13x80 cm)	IS 13630-2 / EN ISO 10545-3	
12.	Resistance to surface abrasion of Glazed tiles	Minimum Class II Report abrasion class and cycles passed	PEI-Class III to Class IV	IS 13630-11 EN ISO 10545-7	
13.	Thermal expansion from ambient temperature to 100 ° C	Test method available	6x10 <sup>4</sup> K <sup>4</sup> Maximum	IS 13630-4 EN ISO 10545-8	
14.	Thermal shock resistance	10 cycles Minimum Test method available	10 cycles Minimum	IS 13630-5 EN ISO 10545-9	
15.	Moisture expansion	Maximum 0.02 Millimeter/Metre Test method available	NiL	IS 13630-3 EN ISO 10545-10	
16.	Crazing resistance (Glazed Tiles)	Passes 4 cycles at 7.5 kg/cm2 Required	Passes 4 cycles at 7.5 kg/cm²	IS 13630-9 EN ISO 10545-11	
17.	Frost resistance	Required	100 cycles Minimum	IS 13630-10 EN ISO 10545-12	
18.	Resistance to Household Chemicals & Swimming Pool Salls #	Minimum Class AA Minimum GB	Minimum Class AA Minimum GB	IS 13630-8 EN ISO 10545-13	
19.	Resistance to low & high concentration of acids & alkalis #	Manufacturer to state classification	Minimum Class AA Minimum GLB,GHB	IS 13630-8 EN ISO 10545-13	
20.	Stain resistance**	Minimum Class 1 Minimum Class 3	Minimum Class 1 Minimum Class 3	IS 13630-8 EN ISO 10545-14	
21.	Slipperiness	Test method available	≥ R-9 to R-10 for Rustic/Matt/Satin Finish ≥ R-9 for Polish Finish	DIN 51130:2014	
22.	Co-efficient of friction	Manufacture to state the class	≥ 0.32 for Rustic/Matt/Satin Finish > 0.20 for Polish Finish	ISO 10545-17	
23.	Scratch hardness of surface(Moh's scale)	Minimum 5 Test method available	Min 6 for Rustic/Matt/Satin Finish Min 5 for Polish/Marbletech Finish	IS 13630-13 EN 101	
24.	Impact Resistance	Minimum 0.55 Test method available	Min 0.55 & No Identification of cracking	IS 13630-14 EN ISO 10545-5	

<sup>#</sup> Resistance to acids & alkalis (Exception of Hydrofluoric acid & its compounds)

\* Applicable in Gallpur plant only.

- Colours in the catalogue are as accurate as printing process allows.
  Please check actual tile sample before making the final selection.
- Sizes mentioned in the catalogue are nominal sizes only.
- · No claim will be entertained once the tiles are fixed.
- For better laying, please follow the instructions on the packaging box.
- In case it is required to lay the tiles on wall or floor in STAGGERED PATTERN, then always lay them in Overlap 20:80 ratio, as shown in VISUAL 1 instead of Brick pattern (overlap 50:50 ratio), as shown in VISUAL 2.



Please make sure to check the shade/finish with the sales agent/dealer before making the final purchase because there might be variation in actual finish and that shown in the catalogue.
The company will not bear any loss in such case.



#### KAJARIA EXPERIENCE CENTRES

### **BANGALORE:**

Farah Icon, 119 2nd Floor, Opp. New Pass Port Kendra, Lalbagh Road, Bangalore-560027, Karnataka Mobile: 9008402951, 9008402949, 9008016799

#### COCHIN:

Door No. 48/557-C, MN Square Near Gold Souk, NH By Pass, Vyttila, Cochin 682019, Kerala

Mobile: 9995868863, 9746473684

7303663188

#### HYDERABAD:

#3 - 143, 1st Floor, Nirvana Building, Kavuri Hills, Police Station Opp. Road, Madhapur Hyderabad - 500081, Telangana Mobile: 9000304996, 9000304992,

9000005383, 7680000890, 9000304997

#### CHENNAI:

Old No.10,New No.46,Montieth Road Above Wait Rose Super market Egmore,Chennai - 600008. Mobile: 9791178678, 9952094333

#### COIMBATORE:

1st Floor, No. 57, Cowley Brown Road, Near Central Library, R.S. Puram, Coimbatore - 641002.

Mobile: 9629944454, 9677708080

## SALES REPRESENTATIVE

ANDHRA PRADESH: HUBLI: TRIVANDRUM: Mobile: 9000300790 Mobile: 9008017863 Mobile: 9995868863

GOA: MADURAI:

Mobile: 7028018708 Mobile: 8595903618

VIJAYAWADA: MANGALORE: Mobile: 9900075960 9000300790 MANGALORE:

CALICUT: PONDICHERRY: Mobile: 7303663188 Mobile: 9677255644

<sup>\*\*</sup> Vitrified tiles have resistance to most of the stains / chemicals but, it is recommended to take due care while laying and for day-to-day maintenance.



JUNE - 2024